



RAJA PEARY MOHAN COLLEGE

রাজা প্যারীমোহন কলেজ

1, ACHARYA DHRUBA PAL ROAD, UTTARPARA, HOOGHLY, WEST BENGAL, PIN - 712258
TEL NO. : 033-2663 0881, FAX NO. : 033-2663 4155

১, আচার্য ধ্রুব পাল রোড, উত্তরপাড়া, হুগলী, পশ্চিমবঙ্গ, পিন - ৭১২২৫৮
দূরভাষ : ০৩৩-২৬৬৩ ০৮৮১, ফ্যাক্স : ০৩৩-২৬৬৩ ৪১৫৫

Website : www.rpmcollege.org e-mail : rajapearymohancollege@gmail.com



Ref. No. / সূচক সংখ্যা _____

Date / তারিখ 22/07/2021

Notice

Quotations are invited from reputed contractors for construction of drain at Southern side and Western side of Raja Peary Mohan College under Uttarpara-Kotrung Municipality, Hooghly.

Closing Date : 29th July, 2021.

স্বাক্ষর

PRINCIPAL
Raja Peary Mohan College
Uttarpara, Hooghly

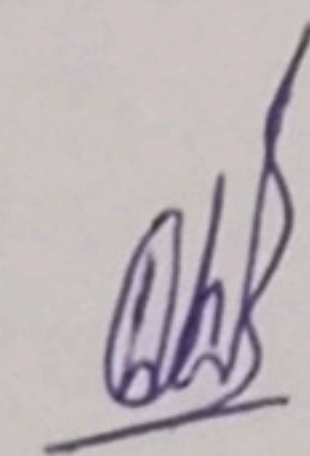
Principal,

Raja Peary Mohan College
Uttarpara, Hooghly.

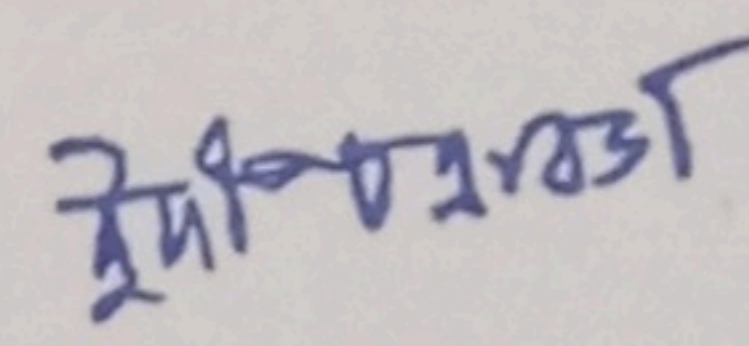
Construction of drain at western side of R.P.M. College under
Uttarpara-Kotrung Municipality, Hooghly

Sl No	Description of items	Quantity	Unit	Rate	Amount
1	Resectioning kutcha drain by mathor labour after removing sludge, filth, night soil etc. and bailing out water from source, making earthen bundh where necessary and removing afterwards, trimming the sides and regrading bottom including necessary chulchalling involving earth work upto 150 mm average thickness and disposal of spoils as directed and fine dressing. (Payment to be made on area trimmed and dressed i.e. the length measured along the profile length).	100.00	Sqm	25.00	2500.00
2	Brick work with 1st class bricks in cement mortar (1:6) (b) In superstructure	12.00	Cum	5625.00	67500.00
3	125 mm. thick brick work with 1st class bricks in cement mortar (1:4) in ground floor.	15.0	Sqm	714.00	10710.00
4	Ordinary Cement Concrete (mix 1 :1.5 :3) with graded stone chips (20 mm.down) excluding shuttering and reinforcement, if any, in ground floor, as per relevant IS codes.(Analysed rate) i) Pakur Variety	10.00	Cum	5751.13	57511.30
5	Plaster (to wall, floor, ceiling etc.) with sand and cement mortar including rounding off or chamfering corners as directed and raking out joints or rougening of concrete surface, including throating, nosing and drip course where necessary. (i) With 1:6 cement mortar (b) 20 mm thick plaster	500.00	Sqm	160.00	80000.00
6	Neat cement punning about 1.5mm thick in wall, dado, window sill, floor etc. NOTE:Cement 0.152 cu.m per 100 sq.m.	500.00	Sqm	34.00	17000.00
TOTAL					235221.30
ADD (6% SGST+6% CGST)					28226.56
TOTAL INCLUDING GST					263447.86
ADD 1% LABOUR WELFARE CESS					2634.48
TOTAL INCLUDING LABOUR WELFARE CESS					266082.33
ADD 3% CONTENGECY					7903.44
TOTAL					273985.77
SAY RS.					273986.00

Rs. Two Lakh Seventy-three Thousand Nine Hundrad Eighty-six Only


L.B.S.

Uttarpara - Kotrung Municipality


Principal
R.P.M. College

PRINCIPAL
Raja Peary Mohan College
Uttarpara, Hooghly

DEBATITHI CHATTERJEE

D.C.E.

ENLISTED L.B.S. OF M.E.D

EMPANELMENT NO. LBS-1/006/U.K.M/20 -20